DRL1600UL

DDR3-1600, PC3-12800, Unbuffered, ECC, 1.35V, 240-pin DIMMs

Products in Family

DRL1600UL/4GB (1 x 4GB 2Rx8 DIMM)
DRL1600UL/8GB (1 x 8GB 2Rx8 DIMM)

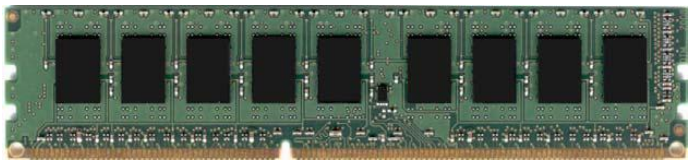

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181” x 5.25”) Data Transfer Rate: 12.8 Gigabytes/sec Operating Voltage: 1.35 V ±0.075 Fully RoHS Compliant	Each DRL1600UL upgrade consists of a single DDR3-1600 Unbuffered ECC DIMM that conforms to JEDEC’s DDR3, PC3-12800 standard. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	DELL Product	Product Description
DRL1600UL/4GB	SNP6DWFJC/4G	4GB 2Rx8 PC3L-12800E-11
DRL1600UL/8GB	SNP96MCTC/8G	8GB 2Rx8 PC3L-12800E-11

Front view

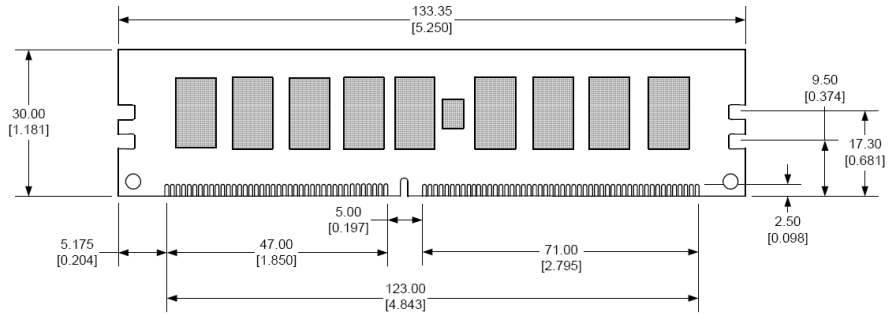

Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

Back view

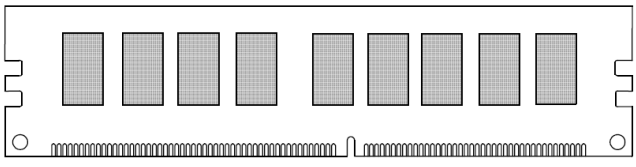

Side view



Copyright © 2014 Dataram Corporation | U.S.A. Headquarters +1 609-799-0071 | Offices in Europe and Asia | www.dataram.com

The information contained in this document has been carefully checked and is believed to be reliable and accurate. However, Dataram assumes no responsibility for errors.